


MF Suction Filter Series



The MF series filters can be installed at the inlet port of pump in order to prevent hydraulic system from contaminant, keep hydraulic circuit clean enough and extend the service life of pump and hydraulic system.

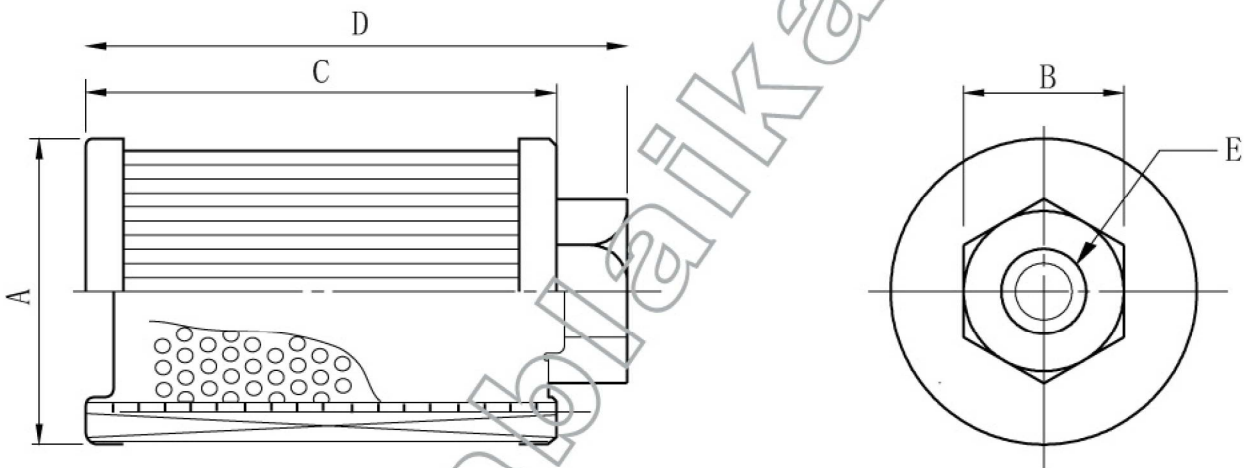

Dimensions (mm) & Technical Data

Model	E	A	B	C	D	Filtration Precision (µm)	Flow Rate (m/l)	apx. Weight (kgs)
MF-02	G1/4"	54	21	86	82	100	20	0.1
MF-03	G3/8"				92		25	0.1
MF-04	G1/2"				30		0.14	
MF-06	G3/4"	34	121	137	56		0.15	
MF-08	G1"	66	42	147	163		110	0.18
MF-10	G1 1/4"	54	166	184	210		0.21	
MF-12	G1 1/2"	85	61	177	194		285	0.32
MF-16	G2"	105	74	198	214		395	0.42
MF-20	G2 1/2"	158	109	252	275		750	1.07
MF-24	G3"						800	1.07