

MTV Series Modular Throttle Valves

Symbols



P T B A

MTV-*P



P T B A

MTV-*T



A

B25

C

D

E

F

G

H

I

J

K

L

M

N

O

P

Technical data

Model	MTV-02	MTV-03
Max. flow rate (l/min)	35	70
Max. working pressure (MPa)	31.5	
Weight (kgs)	1.2	2.4
Hydraulic fluid	Mineral oil	
Seal material	NBR seals	
Temperature range (°C)	-30 to +80	
Viscosity range (mm ² /s)	2.8 to 500	
Oil cleanliness class according to ISO4406	Class 20/18/15	

How to order


MTV	02	P	K
Product type	Size	Function port	Adjustment type
Modular throttle valve	02: NG6 03: NG10	P: P port T: T port	No code: Without knob K: With plastic knob

B26

MTV subplate installation dimensions

Unit: mm

MTV-02

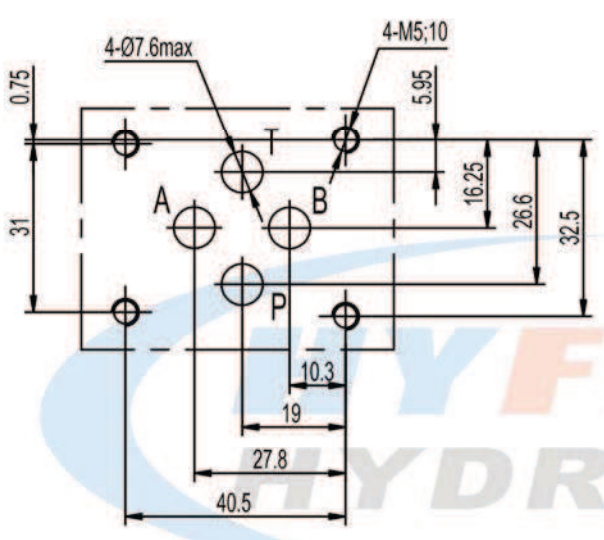

MTV-03

